


## D-SUB Connectors

Conec has developed and expanded the Mixed Layout D Subminiature Connector Family (known as Combination D-Sub Connectors) by adding High Density Layout Versions

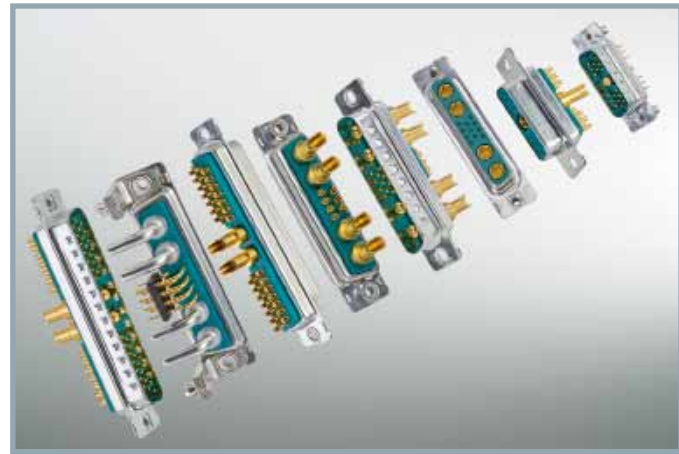

## D-SUB: High Density Mixed Layout

The following High Density configurations are now available:

**19W1, 15W4 and 45W2 in straight solder pin and solder cup termination versions.**



Other styles can be made, available upon request.

These High Density Connectors save space and are ideal for applications where Power, Coax and Signal Contacts are required.

The signal contacts can handle up to 3A, 60V. The power contacts are rated from 10A to 40A and coax contacts are available in 50 and 75 Ohms versions.

All contacts are High reliability Screw Machine type with various levels of plating options available. The insulators are UL94 V-0 rated, and the connectors can be made with Steel Tin Plated, Brass Tin Plated or Stainless Steel shells for extreme applications.

These connectors are very well suited where high reliability, long life and maximum performance is required.

Conec Connectors designed for Performance.

For Full details and specifications please visit [www.conec.com](http://www.conec.com)